


# Marinefloor



modular pontoon



## Floating gateways MARINEFLOOR®

Looking for a solution to link two shores temporarily or permanently?  
Our modular floating gateways, openable or not, are made for that purpose!

From a few meters to several hundred meters, for an attendance from 1 to 15,000 people per day, our team is rapidly deploying gateways that can accommodate the public, securely (guardrails, life line boxes) and accessible to persons with reduced mobility.

In case of crossing a navigable zone, we set up an opening system to enable navigation ... On request, we can equip them with terraces, pontoons, bases for boats or jetskis, electricity, lighting, stands, ...

## Public safety

## Available for renting

## Quick & easy to install & use



### Focus points

- Optimal safety due to its stability, its buoyancy, its finish non-slip and its specific equipment (guardrail, lifeline boxes, ladders, ...)
- Suitable for public use due to its flotation capacity
- Extreme flexibility allowing to follow swell movements
- Easy to install, dismantle, transport, store, ... without any special equipment
- Modular and extendable system for a perfect adaptation
- Withstands harsh conditions, even at sea
- Can be dismantled in a few hours in case of flooding

Our modular floating gateways adjust to the tidal range and let pass the majority of jams (due to a low draught, our end products are unaltered by the current).

As a result, it constitutes an effective solution for nautical, sports and cultural events, but also a pedestrian crossing during a bridge restoration, construction sites, etc.

Available for renting from a couple of days, it enable the craziest project to walk on water, from one shore to another.

## Technical informations :

- Size : 50 cm x 50 cm x 40 cm (4 cubes = 1 m<sup>2</sup>)
- Weight : 6,5 kg/cube (26 kg/m<sup>2</sup>)
- Buoyancy: 90 kg/cube (360 kg/m<sup>2</sup>)
- Resistance of assembling rings : 2 t
- Density : 948 kg/m<sup>3</sup> (test ISO 1183)
- High mechanical resistance (shocks and environmental impacts)
- Impact, frost & seawater resistant - Anti-skid surface
- Flame retarding - Anti-UV & Anti-static treatment
- Standard colors : beige et light grey




### Use :

#### Events :

pedestrian or cycling races,  
stream crossings, access to  
isolated location, openable  
gateways, ...

restauration and construction  
industry : temporary  
replacement or permanent  
bridge, machinery crossing...

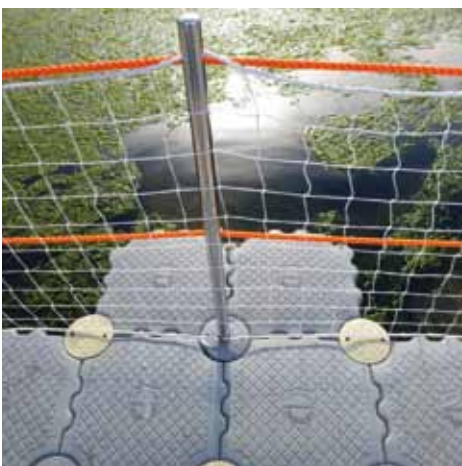

MARINEFLOOR EUROPE SAS  
340 Quai du pla de l'entrée  
Zone Technique du port  
11370 LEUCATE - France

+33(0) 4 68 70 42 83  
[www.marinefloor.fr](http://www.marinefloor.fr)

Made in France



10 years warranty